


MONUMENT RECORD

Corner ID: **CICr_X24**

South-East 1/16 Corner



Section 36 - T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
0.5' x 0.5' sandstone with cut "+" found 0.6' above grade.

MONUMENT LOCATION SKETCH:

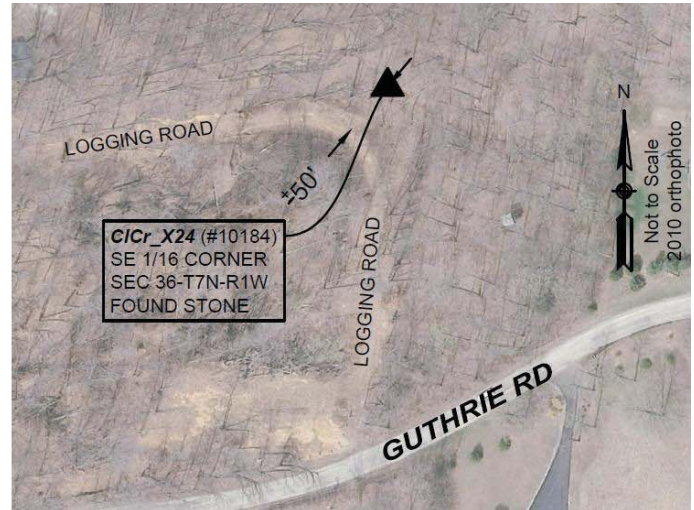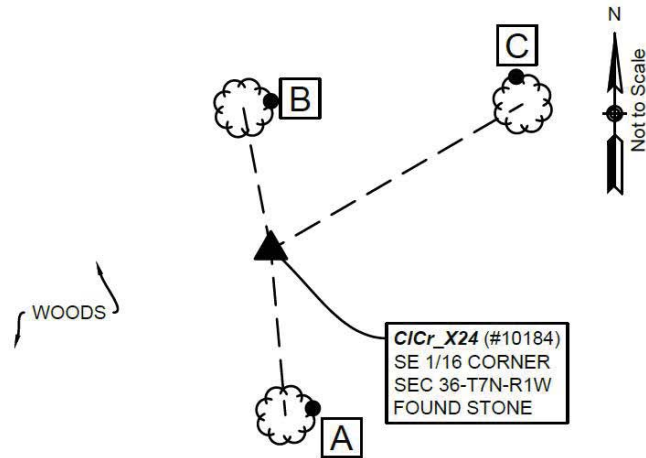

WITNESS MONUMENT TIES: Describe at least three new BT's and/or witness objects established or work done to preserve existing evidence. All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail. Distances to witness ties were measured with a Leica Disto laser distance meter. Bearings were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north.

ID	Bearing	Distance	Description
A	S 5° E	14.5'	Mag nail and washer set 1.4' above grade in hack on east side of 15" maple
B	N 11° W	12.6'	Mag nail and washer set 1.1' above grade on the east side of a 4" maple
C	N 60° E	25.4'	Mag nail and washer set 1.3' above grade on the north side of a 24" red oak

PHOTO IDENTIFIED: Photo Date: 4/17/2018



Photo Orientation & Description: Looking north at CICr_X24



Photo Orientation & Description: Looking east at CICr_X24



MONUMENT RECORD

Corner ID: **CICr_X24**

South-East 1/16 Corner

Section 36 - T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana




Photo Orientation & Description: Looking south at CICr_X24



Photo Orientation & Description: Looking NW at CICr_X24

EXISTING SURVEY HISTORY Include as much detail and history of the corner as known at the time of perpetuation

ORIGINAL GOVERNMENT SURVEY:

Not an original government corner

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 4/16/1903 By: Charles Bowers, MCS

Where filed or recorded: MCSO LSB, pg 588

Original monument: not indicated

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Hickory	6"	West	26 lks
Hickory	3"	N 72.5° W	25 lks

OTHER SURVEY HISTORY: Include details such as surveyor name, date, recording info, monument description, etc.

Date	RSID	Surveyor	Description	Source	Cabinet/Book	Pg	InstNo
4/16/1903	000051	Bowers, Charles	Legal survey in Sections 35 and 36	Surveyor's Office	MCSO Survey Book 2	588	
12/27/1968	000389	Graham, Raymond	McCammon Property	Surveyor's Office	Township Drawers (Surveyor)		
1/15/1979	002567	Graham, Raymond	25.75 acre survey for Robert Decker	Surveyor's Office	Digital Only		
8/19/1986	000392	Farkas, Edmund O.	3.22 acre survey	Auditor's Office	Survey Drawers (Auditor)		
2/12/1991	000397	Archer, Steven W.	2.57 acre survey	Auditor's Office	Survey Drawers (Auditor)		
9/4/1992	000398	Archer, Steven W.	5.00 acre survey	Auditor's Office	Survey Drawers (Auditor)		
4/11/2000	000209	Curry, Douglas R.	Plat of Survey - Eads Estate	Recorder's Office	Filed digitally in the Recorder's Office		2000005949.IN
4/19/2004	000210	Deckard, Eric Lee	Garton Guthrie Boundary Survey DAISY HINKLE GARTON TRUST	Recorder's Office	Survey Cabinet S	223	2004010263.IN
9/11/2007	000222	Curry, Douglas R.	IU Foundation Property	Recorder's Office	Horizontal Plat Cabinet	169	2007016969.IN

Ray Graham depicted an iron pin at this corner on a 1968 survey on file as RSID000389 and a 1979 survey on file as RSID002567. In 1986, Ed Farkas accepted a rebar at this corner on a survey for the property to the southeast, on file as RSID000392. In 1991, Steven Archer surveyed the same parcel to the southeast, and he found and accepted the stone. The stone was accepted by every subsequent surveyor after its discovery.

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 4/17/2018 By: R.Oser & C.Raley Monument Found: sandstone with "+" BTs or Reference Objects Found: None Project #: T07NR01W36 Field Book: 51/72 & 53/48 Notes: We tested the stone with hydrochloric acid and it did not react, so we classified it as sandstone. Fence remains were found in the ground around the stone.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 2 of 3


MONUMENT RECORD

Corner ID: **CICr_X24**

South-East 1/16 Corner

Section 36 - T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana



OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

From Guthrie Road, walk north along an old logging road for approximately 300 feet. The stone is on the east side of the logging road, south of an east/west small creek and west of a shallow north/south flowline.

MONUMENT PRESERVATION: Describe work done to preserve existing monument.

We tied orange flagging around the stone and painted it orange. We set a five-foot t-post 0.4' north of the stone and attached a Monroe County "PROTECT NEARBY SURVEY MARKER" sign 2.6' above grade facing south.

THEORY OF LOCATION: Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty. The stone was accepted with no associated uncertainty.

GEODETIC COORDINATES: Northing: 1365308', Easting: 3128158'

BASIS OF GEODETIC COORDINATES: The basis of bearings is Grid North System NAD83 (2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet. Tied to NSRS using the JAVAD GNSS Data Online Processing Service (DPOS) to post-process static observations collected with a Javad Triumph 2 base. Positional values of this corner were determined from static GNSS and RTK GNSS (Javad Triumph LS Rover) observation.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 36-T7N-R1W by Rachel Oser of the Monroe County Surveyor's Office dated August 5, 2019 and recorded as Instrument Number 2019011075 in the office of the Monroe County Recorder.

CERTIFICATIONS:



Date: August 5, 2019
Rachel Oser, State of Indiana
PS No.21100022



Date: August 8, 2019
Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review
Board on August 6, 2019

